


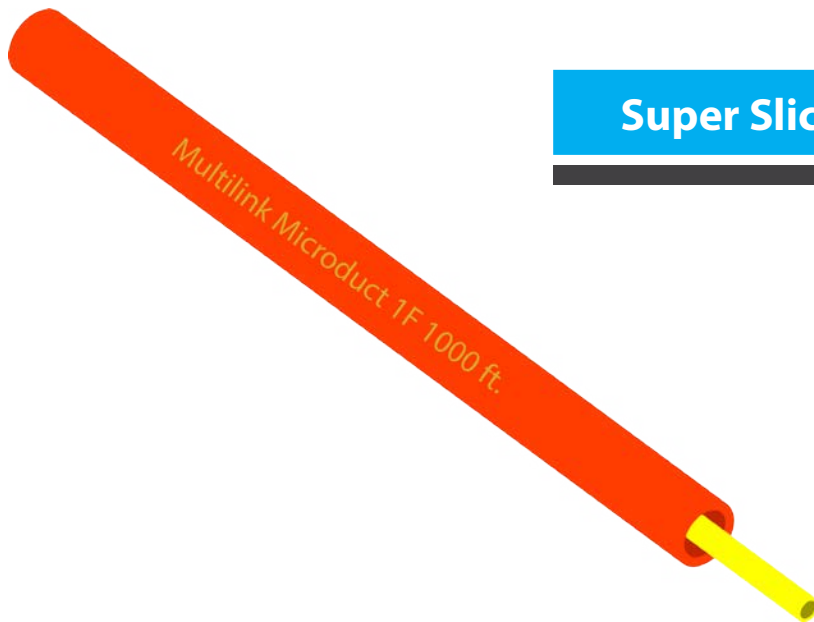

Super Slic™ Plus MicroDuct™

066-704-02

Product Description

Multilink's MicroDuct™ offers a wide variety of options to fit your needs. It is made out of rigid PVC with an outer diameter of 8.5mm and a wall thickness of .055mm. It offers the toughness to take any corners without damaging or bending the MicroDuct™. It is offered in 1 to 12 fibers or can be ordered without fiber, with tracer, with SpeedFlex™ from 1 to 12 fibers and with pull tape. All offerings come on a reel of 1000ft in length. Couplers to connect multiple MicroDuct™ pieces together while protecting from the outside elements are also offered.

Features & Benefits

Super Slic™ permanent lining makes pushing and pulling fiber easy
Printed Sequential Footage
Chemical and Weather Resistance
High Impact Strength Rating
No lubricant needed
Lowest coefficient of friction
Pre-installed fiber
Riser applications for interior use

Specifications

Parameter	Specification
Length:	1,000 Feet
Outer Diameter:	.375"
Inner Diameter:	.22"
Material:	Flexible PVC
Color:	Orange
Flame Rating:	UL94 V-0
Bend Radius:	6"
Flexural Strength:	11,000psi
Tracer Wire:	No
Fiber Count:	2
Fiber Category:	Singlemode (OS2)
Fiber Type:	2MM OFNR Jacketed

Accessories

Field Installation

Products	Description	Stock ID
	Coupler	039-662-20
	Cutter	085-158-10

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 954 499 9203 Mobile: +1 305 684 2388 Email: hquinones@gomultilink.com



Multilink Inc.
580 Ternes Ln
Elyria, OH 44035
Tel: (440) 366-6966
Fax: (440) 366-6802



facebook.com/GoMultilink



twitter.com/GoMultilink



youtube.com/GoMultilink

© Multilink Inc. 2017 • All Rights Reserved

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 954 499 9203
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Mobile: +1 305 684 2388
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: hquinones@gomultilink.com