

Configure Your Enclosure

1. Box Style

2. Removable Back Wall

3. Box Size

4. Type Of Lock

W

H

D

Qty:

5. Secondary Type Of Lock

6. Knockouts

Qty:

7. Box Color

8. Option

9. Material

Optional Accessories

D-Mark Drop Stand

Star Plate

Screen Plate

Internal Equipment

Mounting Plate

D-Mark

Oxboard

Plywood

Ground Lug

Tap Bracket

Lanyard

Lock Dry Lid

Special Plate

Dok 1

Fans

AC Wiring:

DC Wiring:

Rack Rails

10-32:

12-24:

Rack Unit Capacity:

Other

Notes

Mounting Preference

Wall Mount:

Pole Mount:

Unistrut Mount:

Ground Mount:

Shipping Instructions

Bubble Wrap:

Individual Box:

Bulk:

Lock Options

Type Of Lock:

Lock Key Code:

Should Warehouse Send Keys?

Should Lock(s) Be Installed?


*List Any Special Instructions:

Specify Knockout Size

Knockout Type:


CONDUIT/KNOCKOUT MATCHING GUIDE

CONDUIT SIZE	ACTUAL OD	RECOMMENDED KNOCKOUT SIZE
1/2"	.840	7/8"
3/4"	1.060	1-1/8"
1"	1.315	1-3/8"
1-1/4"	1.660	1-11/16"
1-1/2"	1.900	1-31/32"
2"	2.375	2-15/32"
2-1/2"	2.875	2-15/16"
3"	3.5	3-19/32"



Round (Conduit) Knockouts

- A 1-3/8" x 2-15/32"
- B 7/8" x 1-1/8" x 1-3/4"
- C 7/8" x 1-1/8" x 1-3/8" x 1-3/4"
- D 1-3/8" x 1-31/32" x 2-1/2"



PVC Riser Guard Knockouts


- 1.624" x 2.125"
- 2.156" x 2.625"
- 2.656" x 3.125"



Trapezoid Knockouts

- SR075
- SR100
- SR200

Knockout Locations

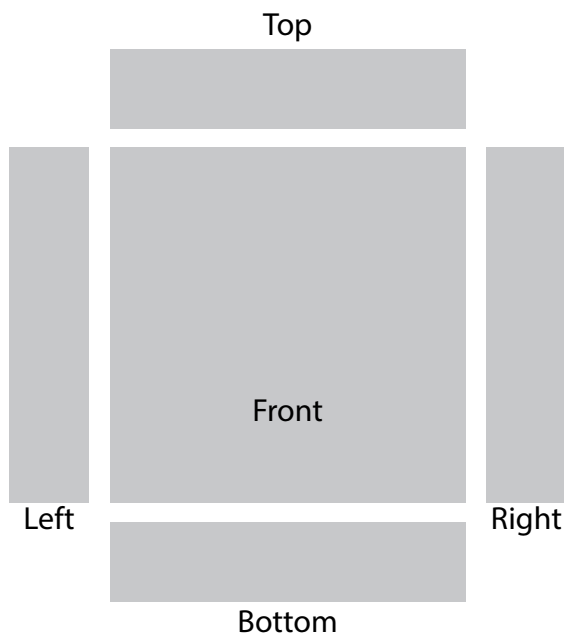

Please check that appropriate boxes to indicate all knockout positions.

