


OPTIMA™

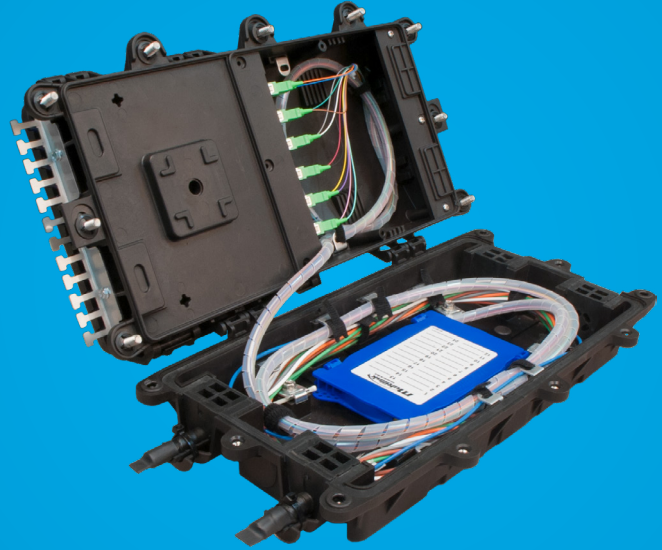

The Optima™ optical cross connect terminal offers the fastest hook up and disconnect of any drop cable field connection. The Optima™ utilized computer aided engineering for optimal use in the Outside Plant and FTTX networks. It utilizes a specially designed precision cost effective drop system with standard bulkhead adapters. The Optima™ brings subscriber terminal deployment to a new level for field installations.

FEATURES & BENEFITS

- Factory Terminated and tested
- 12 port terminal capacity
- The industry's most versatile mounting system
- Pre terminated feeder cable ends OR non connectorized stub ends
- Fast drop deployment to the subscriber
- Designed and tested to meet Telcordia standards
- Provisions for field installation and termination

OPTIMA™ T

WWW.GOMULTILINK.COM/CATEGORIES/OPTIMA



GENERAL INFORMATION

Dimensions	14.84"W x 8.25"H x 3.13"D
Output Ports	12
Feeder Cable Compatibility	Flat Cable
I/O Feeder Ports	2
Material	UV Stabilized Plastic

OPTIMA™ S

WWW.GOMULTILINK.COM/CATEGORIES/OPTIMA



GENERAL INFORMATION

Dimensions	14.84"W x 8.25"H x 4.38"D
Output Ports	12
Feeder Cable Compatibility	Round Cable, Flat Cable
I/O Feeder Ports	2
Splice Tray Capacity	3
Splice Capacity	24 - Per Tray

OPTIMA™ C4

WWW.GOMULTILINK.COM/CATEGORIES/OPTIMA



GENERAL INFORMATION

Dimensions	12.83"W x 7.44"H x 2.16"D
Output Ports	4
Feeder Cable Compatibility	Flat Cable
I/O Feeder Ports	1, 2
Material	UV Stabilized Plastic