



FRM-E-1RU

045-903-10



Product Description

Multilinks Economy Rack Mounts were designed with simplicity in mind. They are engineered to meet industry standards, making them compatible with many of the leading rack manufacturers. The FRM-E-1RU has a 3 termination panel capacity and slide out master panel tray. Quickly configure your own with the ordering guide or at GoMultilink.com

Features & Benefits


- Universal mounting brackets for 19" or 23" Racks
- Plexiglas front for quick convenient visibility
- Slide out tray for an improved working environment
- Removable top on the front and rear of the rack mount for easy access
- Compatible with Multilink's Fiber Termination Modules (FTM)
- Comes with a port designation card
- Improved fiber management

Specifications



Parameter	Specification
Dimensions:	17.0"W x 1.75"H x 13.87"D
Material:	16 Gauge Steel
Finish:	Polyester Powder Coat
Color:	Black
Rack Compatibility:	19" Rack, 23" Rack
Adapter Panel Capacity:	3
Splice Tray:	1120-SSTP
Splice Tray Capacity:	3
Splice Capacity/Tray:	12
Cable Entries & Exits:	4

Accessories

Splice Tray

Products	Description	Stock ID
	1120-SSTP	072-059-10

Loaded Adapter Panel

Products	Description	Stock ID
	SM Simplex SC/UPC	10-4810
	SM Duplex SC/UPC	10-1817
	SM Simplex SC/APC	10-4442

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: lasupport@gomultilink.com

	SM Duplex SC/APC	10-5327
---	------------------	---------

*More options available at GoMultilink.com

Strain Relief

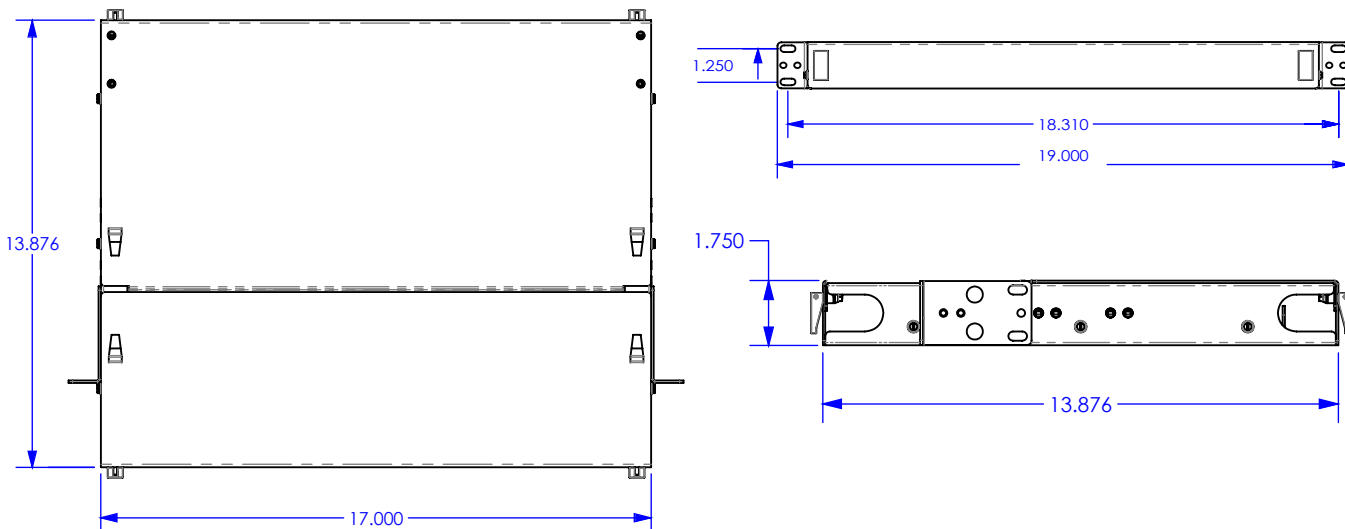
Products	Description	Stock ID
	1RU Strain Relief Kit	065-249-10

Security

Products	Description	Stock ID
	Lock & Key	99534

Dimensional Drawings

045-903-10



Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 440 366 6966
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Fax: +1 440 366 6802
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: lasupport@gomultilink.com

Ordering Guide

ML	68					003		9	12
	1	2	3	4	5	6	7	8	9

1	Rack Mount
68	FRM-E-1RU

2	# of Conn.
006	6
012	12
018	18
024	24
036	36

3	Color
B	Black
O	Off White

4	Adapter
SCS	SC Simplex MM
SCD	SC Duplex MM
SUS	SC Simplex SM
SUD	SC Duplex SM
SAS	SC/APC Simplex SM
SAD	SC/APC Duplex MM
SGS	SC Simplex 10 Gig
SGD	SC Duplex 10 Gig
FC	FC MM
FU	FC SM
LCAD	LC/APC Duplex SM
LCPD	LC Duplex MM
LCUD	LC Duplex SM
LCGD	LC Duplex 10 Gig
SM6	ST 6 Port SM
SM12	ST 12 Port SM
ST6	ST 6 Port MM
ST12	ST 12 Port MM

5	Pigtail
00	NONE
T9	900µm (Spiral Wrap)
RBN	Ribbon
DST	Distribution Cable

6	Length (Meters)
003	3 Meters

7	Tray Count
1	1
2	2
3	3

8	Splice Tray
9	1120-SSTP

9	Splice Count
12	12

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 440 366 6966
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Fax: +1 440 366 6802
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: lasupport@gomultilink.com



Multilink, Inc
580 Ternes Ln, Elyria, OH 44035
Tel: (440) 366-6966 Fax: (440) 366-6802



Scan QR for website.



facebook.com/GoMultilink1



twitter.com/GoMultilink



youtube.com/GoMultilink

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Mobile: +1 440 366 6802 Email: lasupport@gomultilink.com

Contact Us